


PS100 series ceramic pressure sensors

- High accuracy and high stability
- Wide choice of measuring ranges
- Solid ceramic sensitive diaphragm
- Smart volume, easy for encapsulation
- Excellent shock and vibration resistance
- Excellent corrosion and abrasion resistance
- Low cost, extreme extensive application range
- Thermally compensated, wide-range operating temperature



Descriptions

PS100 series ceramic pressure sensor is a dry-type ceramic piezoresistive pressure sensor made of the material ceramic Al_2O_3 96% by special technology, work following the piezoresistive principle, the Wheatstone bridge is screen printed directly on one side of the ceramic diaphragm and the diaphragms' opposite side can be exposed directly to the medium to be measured. Ceramic is a recognized material of high elasticity, corrosion and abrasion resistance, strong shock and vibrant resistance, no additional protection is normally required, and the thermal stability can make its operating temperature from -40 to $125^{\circ}C$.

PS100 series have the characteristic of small dimension, 18mm diameter, 6.35mm thickness, 2~400bar range, high performance-price ration, it has been widely used in various pressure-measuring occasion. Typical applications: process control, environment control, hydraulic pressure and pneumatic equipment, servo valve and drive, chemical products, chemical industry, medical instrument, and other fields.



Parameters


Sensor type	Gauge
Material	Ceramic Al_2O_3 96%
Power supply	3~30VDC
Bridge resistance	11K \pm 20%
Pressure range	0...2Bar to 400Bar
Response time	<1mS
Combined accuracy	0.2%F.S. (Linearity, hysteresis, repeatability)
Zero output	0 \pm 0.2mV/V @25 $^{\circ}C$
Sensitivity	2.0~4.8mV/V
Temperature characteristic	\pm 0.02%F.S./ $^{\circ}C$ (25 $^{\circ}C$ ~85 $^{\circ}C$)
Stability	<0.2%F.S.O./year
Operating temperature	-40~125 $^{\circ}C$
Insulation	>2KV
Dimension	18*6.35mm
Weight	5g

PS100 series ceramic pressure sensors

Typical pressure (Bar)

Rated range	2	5	10	20	30	50	100	200	400
Over pressure	4	10	20	40	60	100	200	400	600
Burst pressure	7	15	35	70	90	150	250	450	600

Dimensions

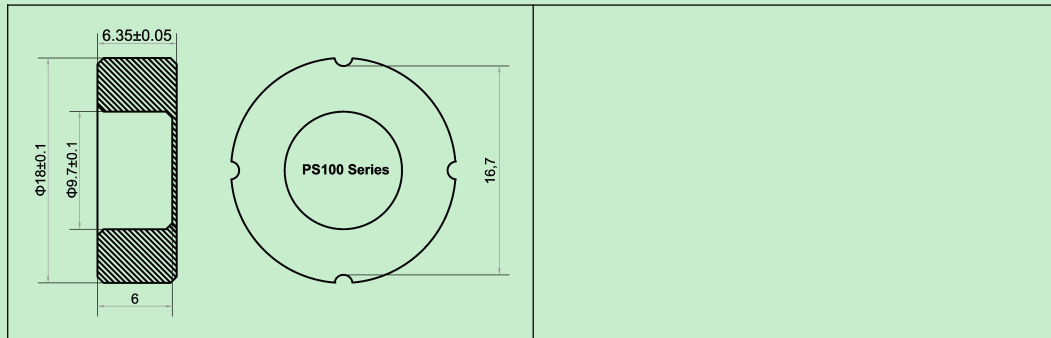

Electrical connections

	Pins	Wires	Function
	V+	Red	Voltage +
	V-	Black	Voltage -
	S-	Yellow	Signal -
	S+	Blue	Signal +

Ordering information

EXAMPLE: **PS100 A 02**

1	Pressure range	A
	A(2bar) B(5bar) C(10bar) D(20bar) E(30bar) F(50bar) G(100bar) H(200bar) I(400bar)	
2	Electrical connection(2.54 mm pitch)	02
	01 4Pins(15mm) 02 4Wires(50mm)	

PS100 series ceramic pressure sensors

Contact us

Company	Ninghai sendo sensor co., Ltd	
Email	sales@sendo-sensor.com	
Email	cain.chen@sendo-sensor.com	
Address	Floor 5, building 2, no.48 jiujuan road, jianggan district, 310000 Hangzhou, China	
Website	http://www.pressuresensorsuppliers.com	http://www.sendo-sensor.com
Skype: sendosensor	We Chat: chenjie4884	WhatsApp: +8613616574884
Tel: 0086-0574-27725960	Fax: 0086-0574-27725970	Phone: 0086-13616574884

*Specifications subject to change without notice, the latest date sheet please contact: sales@sendo-sensor.com