


SS100 series piezoresistive pressure transducers


- Standard size Ø19*15mm
- High accuracy and reliability
- Stainless steel 316L housing
- Stainless steel 316L wetted parts
- 1.0mA, 1.5mA constant current supply
- 5VDC, 10VDC constant voltage supply
- 0-70°C temperature compensation range
- Isolated construction, able to test various media
- Absolute, vented gauge and sealed gauge pressure

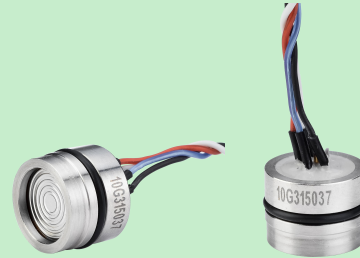

Descriptions

SS100 series piezoresistive pressure transducers cover all pressure ranges from 100mbar to 1000bar(10KPa to 100MPa). A high-sensitivity piezoresistive silicon chip is used for pressure sensing. The chip is protected against ambient influences by a stainless steel housing sealed with a concentrically corrugated diaphragm. The housing is filled with silicone oil so as to ensure the transfer of the pressure from the diaphragm to the sensing component.

Several millions of these pressure transducers are in use world-wide in a variety of different applications. Main fields of applications are: level technology, pneumatic, hydraulics, avionics, etc.

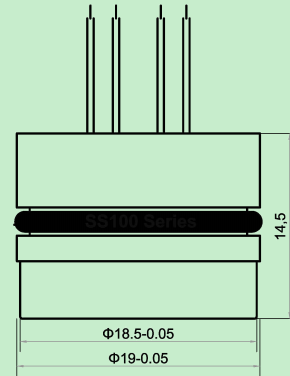

Pressure ranges (typical)

Vented gauge(defining atmospheric pressure as zero) (Unit: Bar)

Range	-1.0	-0.35	-0.2	0.2	0.35	1.0
	2.5	4.0	6.0	10	16	25

Absolute(defining absolute vacuum as zero) (Unit: Bar)

Range	1.0	2.5	4.0	6.0	10	16
	25	40	60	100	160	250
	400	600	1000			

Sealed gauge(defining standard atmospheric pressure as zero) (Unit: Bar)

Range	10	16	25	40	60
	100	160	250	400	600
	1000				

SS100 series piezoresistive pressure transducers

Technical data

Power supply	1.5mADC (typical)	5VDC, 10VDC is on request
Zero output	±2mV	
Span output	100±20mV (typical)	
Accuracy	0.25%F.S. (typical)	
Overload	2.0*F.S. (<250Bar)	
	1.5*F.S. (≥250Bar)	
Temperature compensation	0~70°C	
Operating temperature	-20~100°C	
Storage temperature	-40~125°C	
Zero thermal error	≤0.02 %F.S./°C	
Sensitivity thermal error	≤0.02 %F.S./°C	
Bridge resistance	2.3KΩ~4KΩ	
Insulation	100MΩ/250VDC	
Vibration	20g/(20~5000Hz)	
Endurance	>100 x 10 ⁶ F.S. cycles	
Stability	≤0.2% F.S./Year	

Constructions

O-ring	Viton(Ø16*1.7mm)	
Wetted parts	Stainless steel 316L	
Housing	Stainless steel 316L	
Filling liquid	Silicone oil	
Electrical connection	10cm silicone sheathed wires	Kovar pins is on request
Diameter	Ø19mm	
Height	14.5mm	
Weight	15g	

Electrical connections

wires		Pins(1)		Pins(2)	
Color	Function		PIN1: Supply +		PIN1: Supply +
Red	Supply +		PIN2: Output -		PIN2: Output +
Black	Supply -		PIN3: Supply -		PIN3: Supply -
White	Output +		PIN4: Supply -		PIN4: Supply -
Blue	Output -		PIN5: Output +		PIN5: Output -

SS100 series piezoresistive pressure transducers

Ordering information

EXAMPLE: [SS100 J 01 B 01](#)

1	Pressure range(Bar)	J
	A(-1.0) B(-0.35) C(-0.2) D(0.2) E(0.35) F(1.0) G(2.5) H(4.0) I(6.0) J(10) K(16) L(25) M(40) N(60) O(100) P(160) Q(250) R(400) S(600) T(1000) U(Other range or unit is on request)	
2	Pressure type	01
	01 Vented gauge 02 Absolute 03 Sealed gauge	
3	Electrical connection	B
	A 4Kovar pins(1) B 4Wires C 5Kovar pins(1) D 5Wires E 4Kovar pins(2) F 5Kovar pins(2)	
4	Power supply	01
	01 1.5mADC 02 5VDC 03 10VDC 04 Other supply is on request	

Contact us

Company	Ninghai sendo sensor co., Ltd	
Email	sales@sendo-sensor.com	
Email	cain.chen@sendo-sensor.com	
Address	Floor 5, building 2, no.48 jiujuan road, jianggan district, 310000 Hangzhou, China	
Website	http://www.pressuresensorsuppliers.com	http://www.sendo-sensor.com
Skype: sendosensor	We Chat: chenjie4884	WhatsApp: +8613616574884
Tel: 0086-0574-27725960	Fax: 0086-0574-27725970	Phone: 0086-13616574884

*Specifications subject to change without notice, the latest date sheet please contact: sales@sendo-sensor.com